

pulse-8



Add a splash of colour to your world with the new Pulse 8 range from OE Electrics. Based on our top selling Pulse unit, Pulse 8 is now available to order in a choice of 8 lively colours with a choice of black or grey sockets.

Pulse 8 can be specified with wide range of OE Electrics modular power data and AV sockets including our class leading (TUF) USB fast charger.

In addition multiple bracket options allow Pulse 8 to be fitted to desk tops, screens, tool/equipment rails and many other locations

All OE Electrics products are manufactured to enable compliance with BS6396 or BS7671 where relevant.



USPs

- Choice of 8 new colours
- Available with TUF charger
- BS6396 compliant (where applicable)
- Available with sockets from different nationalities
- Desk, screen or rail mounting
- Wide range of power, data and AV options

pulse 8




oeelectrics
always innovating

United Kingdom - Germany - Dubai - Australia

OE House, Thomas Maddison Lane, Calder Park,
Wakefield, West Yorkshire, WF4 3GH
Tel: +44 (0) 1924 367255 Fax: +44 (0) 1924 290652
Email: sales@oeelectrics.co.uk www.oeelectrics.com


technical

Common Modular Components*

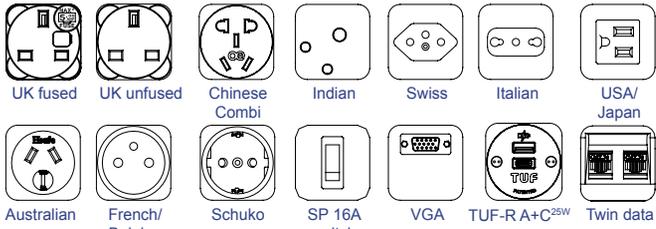


*See website for more

Unit dimensions

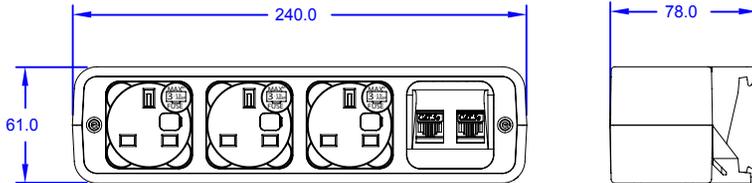


Common Units


Other configurations are available on request



Pulse 1001




Pulse 1002




Pulse 1005




Pulse 1007




Pulse 1008




Pulse 1009




Pulse 1010



Pulse 1011



Pulse 1132



Pulse 1147

Standard Fixings

- PCB Clamp Bracket 15 - 35mm
- PEC Clamp Bracket (Extended) 38 - 55mm⁺
- PLC Clamp Bracket (Long-Reach) 15 - 35mm⁺
- PTR Tool rail fixing*
- HTC HT Beam fixing

*Please call to confirm screen/toolrail compatibility
⁺Available on application

Features

Configuration:

- AC Power sockets only
- AC Power sockets plus data/AV
- AC power plus TUF charger
- AC power, TUF charger plus data/AV

BS6396 compliance:

- UK fused sockets are fitted with either 3.15 or 5 amp fuses for BS6396 compliance
- Internal separation between power and data/AV components
- UK socket versions are supplied with 250mm earth bonding lead

Mounting:

Desk edge clamp bracket or tool/equipment rail fixing options

Power cord:

Hardwired power cord Wieland GST connector or appropriate national mains plug

Testing:


All PULSE-8 units are visually inspected and 100% electrically tested before dispatch

Approvals:

BS5733 certified



PTR - Screen Fixing

Standard tool-rail bracket
 Please call for confirmation



HTC - HT Beam

fixing - suitable for fixing to HT Beam

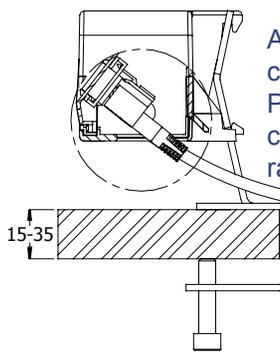

Angled data fascias allow data cabling to pass straight through PULSE-8, ensuring the integrity of cables which have a minimum bend radii (CAT5e, CAT6 etc)

CB - Clamp Bracket

Clamps are available for desk thicknesses between 15 and 35mm
 (Call for other desk thicknesses)